


Ascentac OCAMS2010, Chassis of Remote Test Unit (RTU) with standard 6U design, can be mounted in 19, 21 or 23-inch EIA-310 racks. The outer frame is rust-proof. In addition, the chassis is equipped with fans which provides quite excellent heat dissipation. Fans can be easily taken down for cleaning or replacement.

Ascentac OCAMS2010, Chassis, has 17 slots whose numbers from right to left are 1 to 17. Slots 1 to 4 are generally fixed with Power Supply Unit (PSU) and Monitor Control Unit (MCU), while other modules can be mounted in other slots at will.

## Description

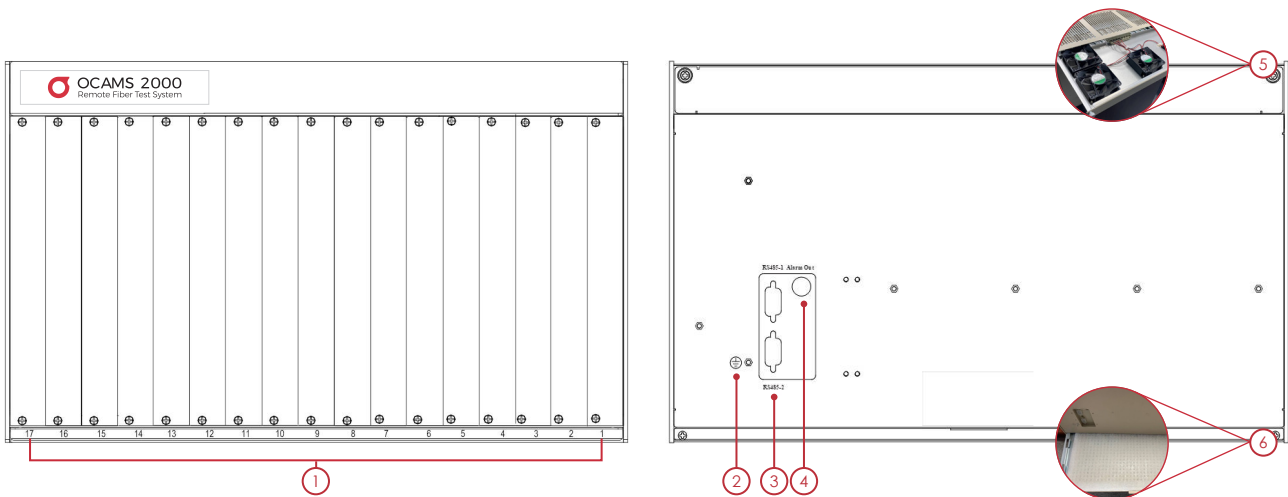

- ① 17 slots
- ② Ground point
- ③ Serial port, RS485 interface for concatenating chassis
- ④ Alarm output port
- ⑤ Fans for heat dissipation with replaceable design
- ⑥ Filter screen with replaceable design

## Specification

Chassis	
Model	OCAMS2010
Slot	17
Interface	RS485
Size (H x W x D) (mm)	265 x 440 x 230
Weight (kg)	7.04
Accessories	1. Front stand (Depth: 120mm) for protection and accommodating fiber-optic patch cords 2. Mounting ears for 19, 21 or 23 rack installation

## Ordering Information



**Example :** OCAMS 04-20100 + OCAMS 04-20110



**Ascentac Inc.**  
Tax ID:50806831  
Tel:07-398-1000  
Fax:07-398-3965  
Web:www.ascentac.com  
Email:sales@ascentac.com  
11F.-1, No. 80, Minzu 1st Rd., Sanmin Dist.,  
Kaohsiung City 807, Taiwan (R.O.C.)



Distributor :