

CWDM or C-band DWDM+Power Meter

Ascentac MFNS7100&7500

Maximizing Network Capacity with Low Cost and High Efficiency & Identifying Faults Section

Feature

- Up to 40 λ available, initial wavelength and number of channels specifiable
- Scanning fast and measuring value of optical power in dual-direction
- LC connector

Application

- Data center or FTTH
- Fiber monitoring
- CATV network
- 4G or 5G fronthaul


Description

Ascentac MFNS7100 & 7500 Series, CWDM / C-band DWDM with Power Meter, can combine multiple wavelengths from different fibers via optical multiplexer onto one single fiber for transmission. It is used for 5G wireless fronthaul optical data transport network solution.

This series features low power consumption, low insertion loss and high isolation. It also has excellent wavelength stability. The initial wavelength and number of channels are specifiable. It has its own Element Management System (EMS) which can be used to manage equipment. Users are allowed to set different thresholds. The system also has alarm function which users can identify whether faults occur in the end of BBU (Base Band Unit) or AAU (Active Antenna Unit) or in the middle of optical cables.



Appearance

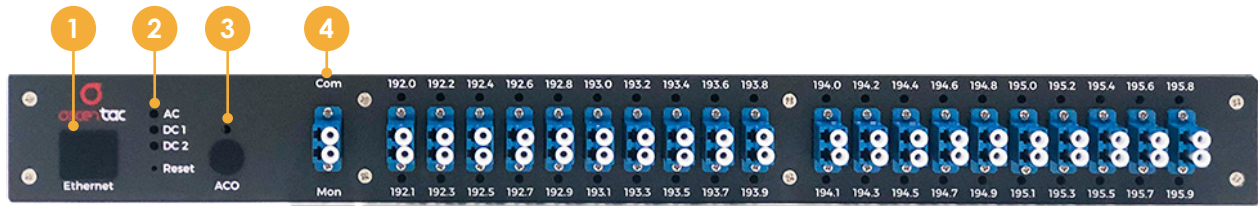

- 1 Ethernet RJ45 interface (10M / 100M / 1000M)
- 2 LED power indicator (AC / DC1 / DC2)
- 3 LED alarm indicator (ACO=Alarm Cut Off)
- 4 Optical interface & LED indicator for the status of optical power




- 5 AC power supply: 100 to 240V (50/60Hz)
- 6 Power switch
- 7 Fuse
- 8 DC power supply: 36 to 72V
- 9 External alarm interface (Dry & wet contact) (-48VDC power output)
- 10 Fan
- 11 Ground point

1U Managed Rackmount Design with High Flexibility



Ascentac MFNS7100 & 7500 Series can be mounted in a standard-sized, 19 “ or 23” -wide rack.

Width x Height x Depth: 438 x 44.4 x 240 mm

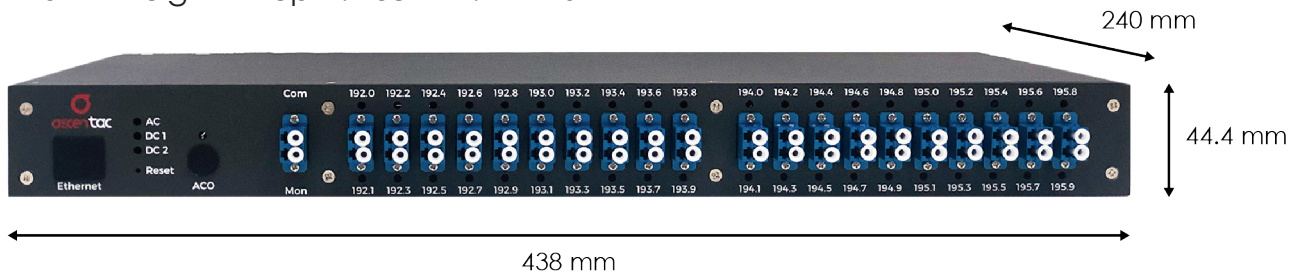

EMS Structure

The Element Management System (EMS) can contain the equipment of each district with the hierarchical design. Different classes and names can be defined by users. The monitoring data between the end of Base Band Unit (BBU) and the end of Active Antenna Unit (AAU) can be collected in this system.

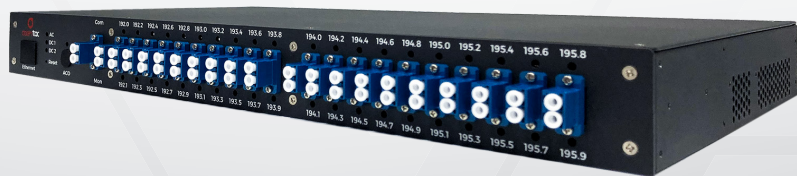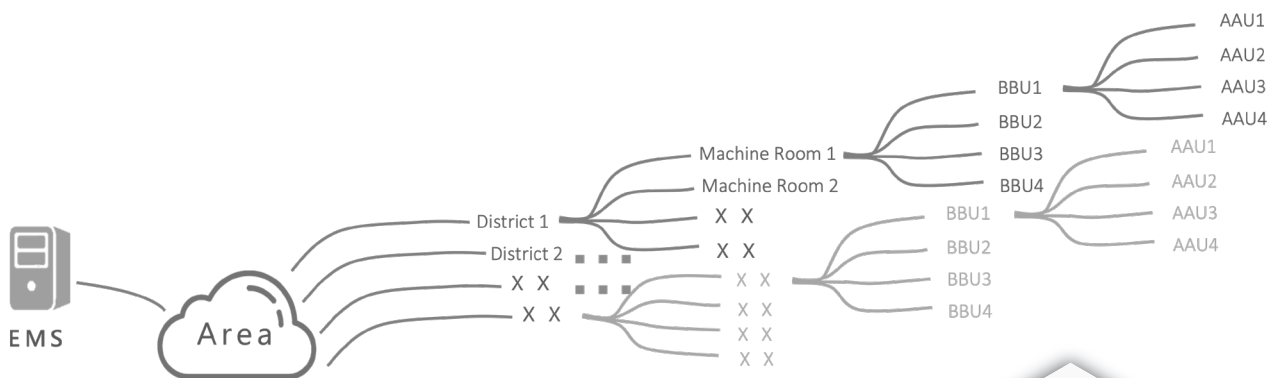

EMS Interface

Dashboard



CWDM / DWDM List

設備名稱	基地名稱	設備型號	IP	Port	Community	服務狀態	所屬	設定	測試	當前位置
212507L	中山四平	DWDM	192.168.101.184	162	public	ON	北一機房	監控	測試	板橋機房
212507L	中山四平	DWDM	192.168.11.211	162	public	ON	北一機房	監控	測試	板橋機房
212517L	板橋機房	DWDM	192.168.101.245	162	public	ON	北一機房	監控	測試	板橋機房

Personnel Management

姓名	帳號	密碼	權限	電話	備註	服務狀態
admin	212507L	192.168.101.184	162	public	ON	北一機房
David	at001	192.168.11.211	162	public	ON	北一機房
Jacky	at004	192.168.101.245	162	public	ON	北一機房

Alert



Detailed Information

Channel	ITU frequency (THz)	ITU wavelength (nm)	Optical power (dBm)	Status
20	192.0	1561.42	-0.08	●
21	192.1	1560.61	-11.52	●
22	192.2	1559.79	-0.19	●
23	192.3	1558.98	-14.21	●
24	192.4	1558.17	-0.49	●
25	192.5	1557.36	-12.12	●

CWDM / DWDM Setting

Several thresholds can be set. Alarm will be generated if the value is lower then the threshold.



SFP : Small Form-factor Pluggable


Area Management

Levels and names can be defined by users as the tree structure on the left side of the interface.

區域名稱	人員名稱	所屬區域名稱
台北營運處	admin	0
新北中心	admin	0
台北二機房	admin	0
台北三機房	admin	12
板橋機房	admin	13
台中營運處	admin	14
雙溪中心	admin	15
高雄營運處	admin	16
台南中心	admin	17
高雄二機房	admin	18

Performance Management

Monitor the performance status of the operation and be integrated with the customer's Network Management System (NMS) if required

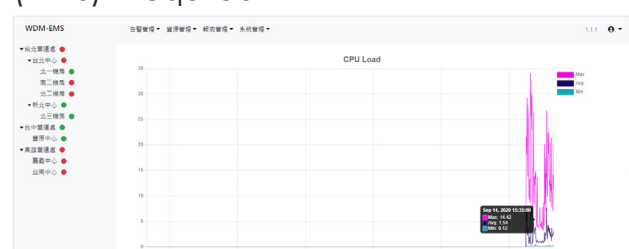


EMS : Element Management System


NMS : Network Management System

Application


1. The fault occurs at one end of the BBU.

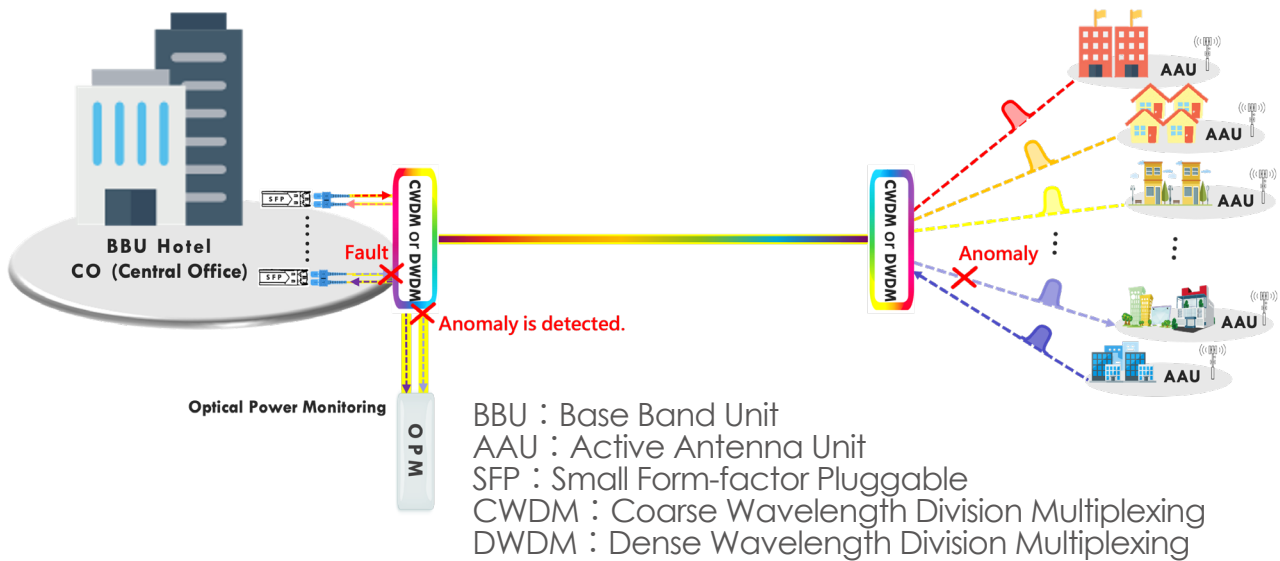

2. The fault occurs at one end of the AAU.

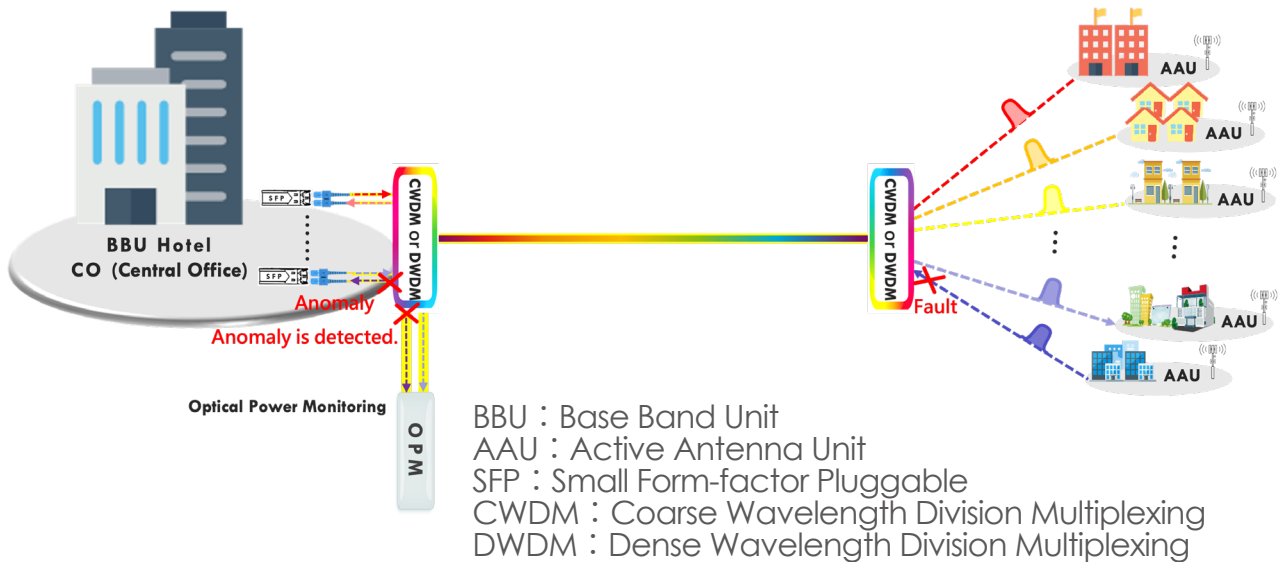

3. The fault occurs in the middle of the optical cable.

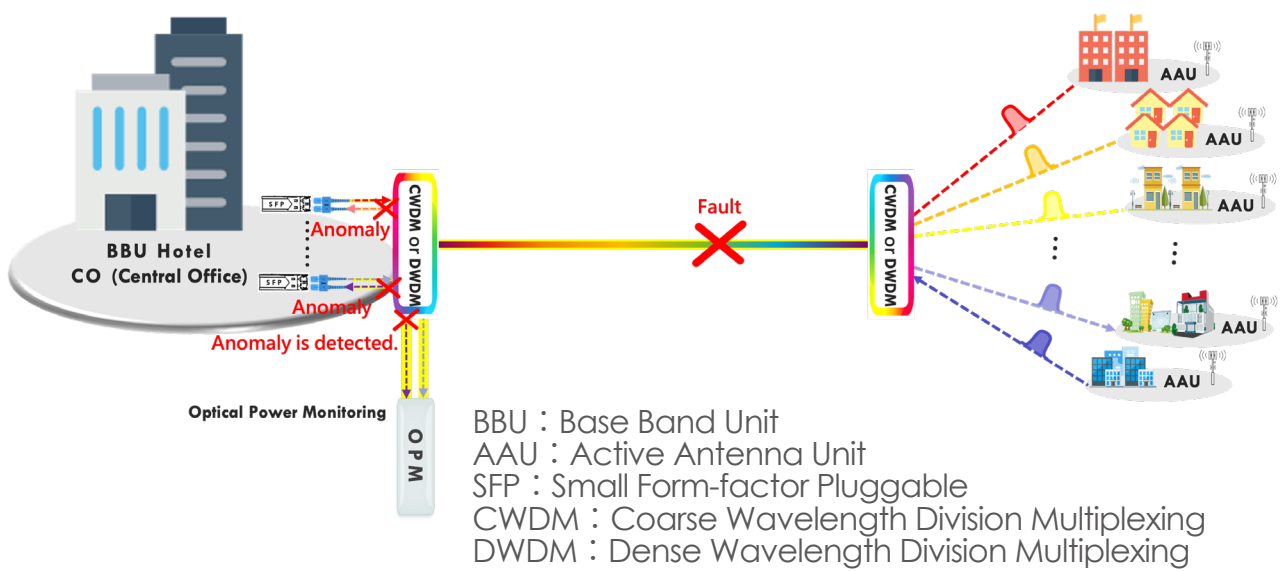

Specification

CWDM or C-band DWDM with Power Meter					
Model		MFNS7100 (CWDM)		MFNS7500 (C-band DWDM)	
Wavelength Range		1271 to 1611 (nm)		192.0 – 195.9 (THz)	
Maximum Channel		18		40	
Channel Spacing		20 (nm)		100 (GHz)	
Power Range (dBm)		+10 to -35			
Maximum Input Power (dBm)		+27			
Accuracy (dB)		± 0.5		± 1.0	
Insertion Loss (dB)	COM → Channel	3.7		4.4	
	COM → Mon	18.6		18.6	
	Channel → Mon	22.2		22.9	
Channel Isolation (dB)	Adjacent	30		25	
	Non-adjacent	45		30	
Return Loss (dB)		40			
Measurement Time (s)		1		10 (Typical) (Full scan)	
Resolution (dB)		0.01			
Optical Connector		LC/PC			
Working Temperature (°C)		0 to +50			
Storage Temperature (°C)		-10 to +70			
Relative Humidity (%)		5 to 85 , Non-condensing			
Size (H x W x D) (mm)		44.4 x 438 x 240			
Weight (kg)		< 4 (About 3.9)			

Ordering Information

CWDM

MFNS 07- X 71XX

Model

A : The value of optical power can be measured.

Channel

- 01: 2-CH, 2 wavelengths (1 pair of TX & RX)
- 02: 4-CH, 4 wavelengths (2 pairs of TXs & RXs)
- 03: 6-CH, 6 wavelengths (3 pairs of TXs & RXs)
- 04: 8-CH, 8 wavelengths (4 pairs of TXs & RXs)
- 05: 10-CH, 10 wavelengths (5 pairs of TXs & RXs)
- 06: 12-CH, 12 wavelengths (6 pairs of TXs & RXs)
- 07: 14-CH, 14 wavelengths (7 pairs of TXs & RXs)
- 08: 16-CH, 16 wavelengths (8 pairs of TXs & RXs)
- 09: 18-CH, 18 wavelengths (9 pairs of TXs & RXs)

* TX: Transmit; RX: Receive

Notes : 1. Please specify wavelengths after choosing the number of channel. (Options for wavelengths: 1271nm, 1291nm, 1311nm, 1331nm, 1351nm, 1371nm, 1391nm, 1411nm, 1431nm, 1451nm, 1471nm, 1491nm, 1511nm, 1531nm, 1551nm, 1571nm, 1591nm & 1611nm)

Example : MFNS 07-A7101

Wavelength : 1271nm 、1291nm ◦

C band DWDM

MFNS 07- X 75XX

Model

A : The value of optical power can be measured.

Channel

- 01 : 12-CH, 12 wavelengths (6 pairs of TXs & RXs)
- 02 : 16-CH, 16 wavelengths (8 pairs of TXs & RXs)
- 03 : 20-CH, 20 wavelengths (10 pairs of TXs & RXs)
- 04 : 24-CH, 24 wavelengths (12 pairs of TXs & RXs)
- 05 : 28-CH, 28 wavelengths (14 pairs of TXs & RXs)
- 06 : 32-CH, 32 wavelengths (16 pairs of TXs & RXs)
- 07 : 36-CH, 36 wavelengths (18 pairs of TXs & RXs)
- 08 : 40-CH, 40 wavelengths (20 pairs of TXs & RXs)

* TX: Transmit; RX: Receive

Note : 1. Please specify wavelengths after choosing the number of channel. (Options for wavelengths: 192.0THz, 192.1THz, 192.2THz, 192.3THz, 192.4THz, and so forth. Only until 195.9THz)

Example : MFNS 07-A7501

Wavelength : 192.0THz、192.1THz、193.2THz、193.3THz、193.6THz、
193.7THz、194.4THz、194.5THz、194.6THz、194.7THz、195.8THz、195.9THz。

