



Fast and Accurately Find the Target Cable in a Complicated Environment by Lightly Hitting Cables.

Ascentac OCI 600 Series, Optical Cable Identifier is specially designed for fast, accurate and non-destructive identification of target optical cables. The identifier applies the principle of light interference to transform mechanical vibration to visual or audio signals. Technicians only need to lightly hit cables. With its high sensitivity and noise reduction, the identifier can lower noises to make technicians clearly hear the knocking sound by earphones. For visual signal, the strength is classified into ten grades with three colors, involving red, yellow and green. Technicians can easily recognize whether it is the target cable through the colors.

Ascentac OCI 600 Series is easy to operate by its one-touch automatic testing and available to various environments because of its strong on-spot application capacity. The powerful functions not only greatly reduce the time, cost and errors of urgently repairing optical cables for technicians but also significantly improves the work efficiency.

Benefits

- Present whether the target cable has been hit in bar graph or ECG (Electrocardiography)
- Dual identification methods (By visual or audio)
- Strong environmental adaptability e.g. manholes, tunnels, conduits, aerial etc.
- Noise suppression
- Adjustable receiver sensitivity

Application


- Optical cable construction, installation & maintenance
 1. Pinpoint unlabelled patch cords in the equipment room
 2. Identify far-end cables under different environment like manholes, tunnels, conduits or elevated construction
 3. Fiber cut, splicing, resource inventory

Description


- ① Power status indicator
- ② Laser-on indicator
- ③ One-touch automatic measurement
Intuitive interface for easy use
- ④ Shatter-resistant sleeve
- ⑤ Outdoor-enhanced 4.3 inch TFT color LCD with backlight function (Comfortable to read display for any abominable environments)
- ⑥ A stand for hands-free
- ⑦ Dust cap for protecting optical interface
 - a. Visual fault locator (Option)
 - b. Optical power meter (Option)
 - c. Optical cable identifier / Optical light source (Option)
 - d. USB-A / USB-C / Headphone port
 - e. Ethernet



Multifunction in One Unit (Option)

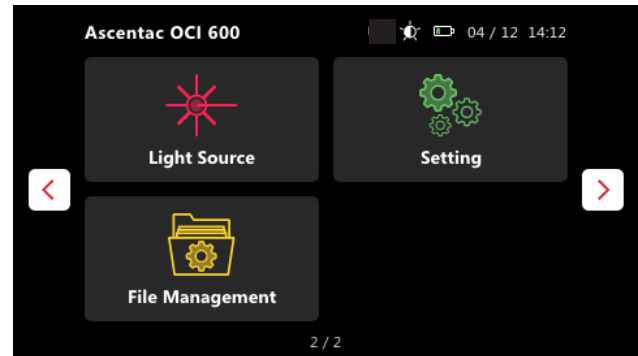


Present Whether the Target Cable Has Been Hit in Bar Graph or ECG (Electrocardiography)

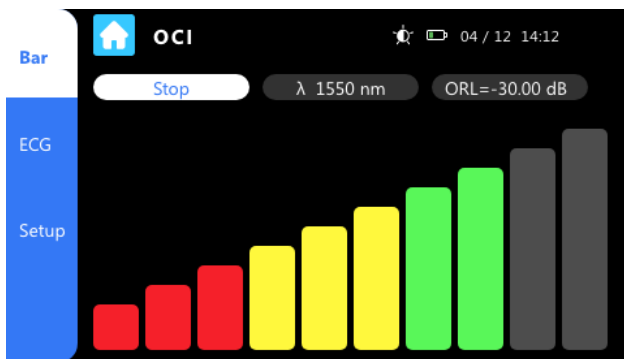


Feature



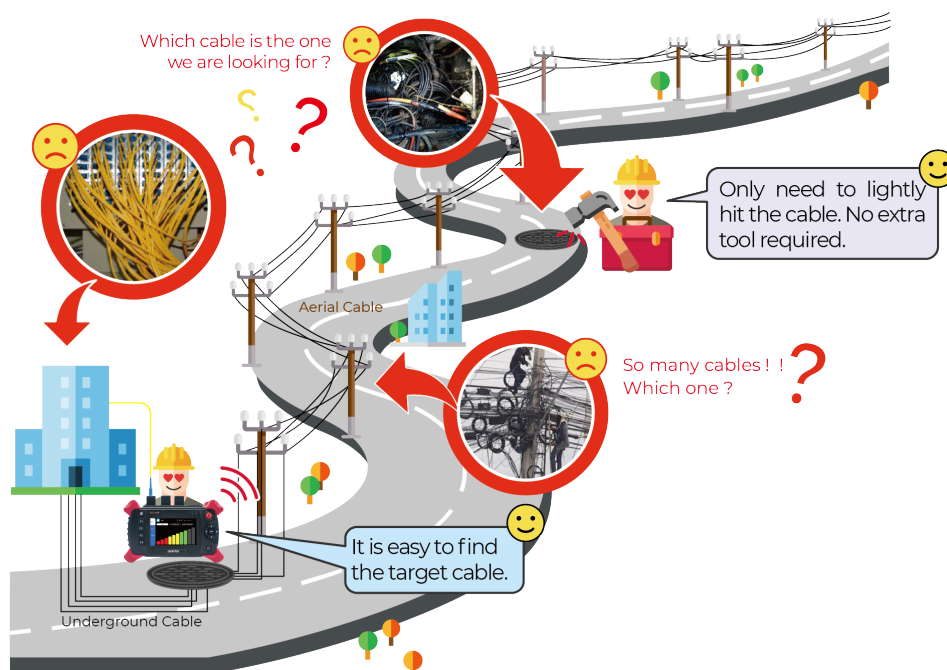



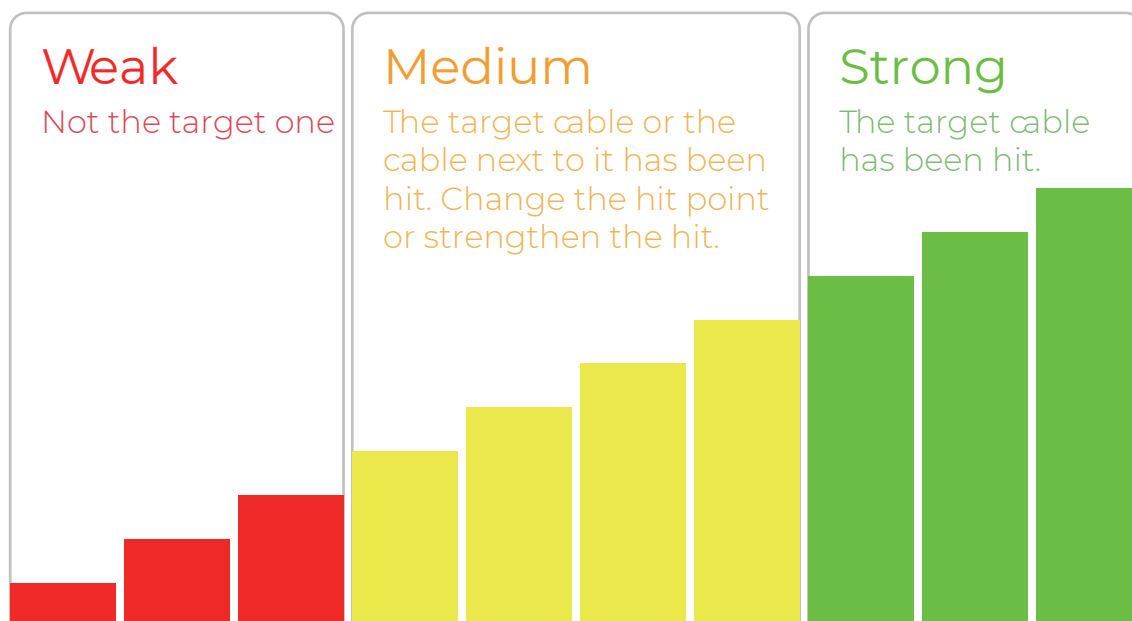


Easily identify far-end target cables under different environments



How to Know Whether the Target Cable Has Been Hit or Not Refer to the Color Indicator



Product Advantage

		VS		
Brand New Solution			Traditional Method	
OCI 600 & Lightly hit cables			Pull cables one by one, bending, freezing, visual fault locator or fiber identification instrument	
Fast & accurately identify target cables			Time-consuming & laborious	
Non-harmful to optical cables			Cables are easily damaged	
No extra tools required			Extra tools may be required	
Easy operation			Inconvenience (Cables may be bundled.)	
Test distance > 60km			Short test distance	

Specification

OCI Specification

Wavelength (nm)	1550 ± 20
Output Power (dBm)	≥ -5
Dynamic Range (dB)	≥ 15
Test Distance (km)	≥ 60 1.Fiber end is physical contact (PC) connector 2.Fiber loss @ 0.18 dB/km
Signal to Noise Ratio (dB)	≥ 30
Optical Connector	SC/APC

OPM Specification (Option)

Power Range (dBm)	+26 to -40
Detector	InGaAs
Uncertainty (dB)	≤ ± 5 % or ≤ ± 0.25 dB (@-10dBm or -20dBm)
Resolution (dB)	0.01
Calibrated Wavelength (nm)	1310、1490、1550、1625
Optical Connector	SC/PC

OLS Specification (Option)

Central Wavelength (nm)	1550 ± 20
Output Power (dBm)	≥ -5
Spectral Width (nm)	≤ 5
Stability (dB)	≤ ±0.5 Continuous operating @ 26 ° C
Modulation Output	CW (Continuous Wavelength) 、270Hz、1kHz、2kHz
Optical Connector	SC/APC

VFL Specification (Option)

Wavelength (nm)	650±10 (Visible)
Output Power (mW)	1
Modulation Output	CW (Continuous Wavelength) 、1Hz、2Hz
Distance (km)	5
Optical Connector	Universal 2.5mm

OLM Specification (Option)

Working Wavelength (nm)	1550
Measurement Range (dB)	0 to 35 (Light source based on OLS function)
Uncertainty (dB)	≤ ± 5 % or ≤ ± 0.25 dB (@-10dBm or -20dBm)

Display

4.3 inch ultra-bright TFT color touch LCD with backlight function

Power Supply

Battery Capacity (mAH)	≥ 13360
Battery Life (hours)(with backlight)	≥ 8
Stand-by Time (month)	≥ 10
DC Input Voltage (V/Amp)	5V / 3A

Environment

Working Temperature (°C)	0 to +50
Storage Temperature (°C)	-20 to +60
Relative Humidity (%)	5 to 95, Non-condensing

Dimensions and Weight

Size (H x W x D) (mm)	133.01 x 202.7 x 70.43
Weight (g) (batteries included)	850


Others

Interface	1. Type-A USB 2. Type-C USB 3. 10/100Mbps Ethernet RJ-45 4. 3.5mm headphone port
-----------	---

Standard Accessories

Main unit, Adaptor cleaning sticks (2.5mm) 10pcs, Carrying bag, Shoulder strap, Built-in lithium battery, USB Power Adapter, USB Cable, One-year warranty.

Ordering Information

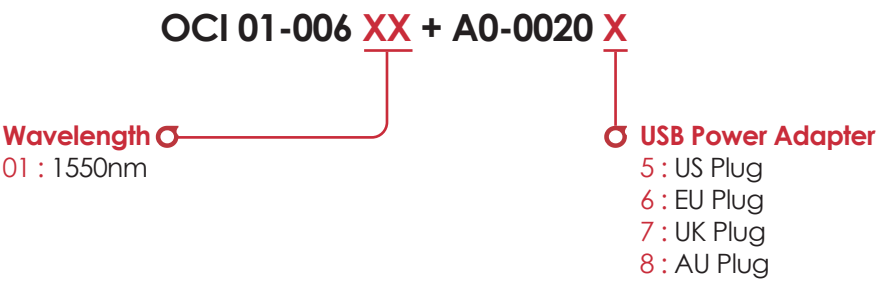

Note : 1. OCI with built-in SC/APC adaptor.

Option

Visual Function Locator (VFL)

A1-01504	1mW, Built-in Universal 2.5mm Tip Sleeve
----------	--

Optical Light Source (OLS)

A1-02222	Central Wavelength 1550nm, Output Power \geq -5dBm, Optical Connector SC/APC
----------	--

Optical Power Meter (OPM)

A1-03021	Power Range +26dBm to -40dBm, Optical Connector SC/PC
----------	---

Optical Loss Meter (OLM)

A1-04100	Measurement Range 0 to 35dB
----------	-----------------------------

Battery

A0-00501	4.2V 13360mAh Lithium
----------	-----------------------

USB Power Adapter

A0-00205	USB Power Adapter, US Plug
----------	----------------------------

A0-00206	USB Power Adapter, EU Plug
----------	----------------------------

A0-00207	USB Power Adapter, UK Plug
----------	----------------------------

A0-00208	USB Power Adapter, AU Plug
----------	----------------------------

USB Cable

A0-00305	USB-A to USB-C
----------	----------------

Fiber Optic Cable

A0-00601	Single Mode 9/125-SC/UPC to SC/UPC-2m
----------	---------------------------------------

A0-00602	Single Mode 9/125-SC/UPC to LC/UPC-2m
----------	---------------------------------------

A0-00603	Single Mode 9/125-SC/UPC to ST/UPC-2m
----------	---------------------------------------

A0-00604	Single Mode 9/125-SC/APC to SC/UPC-2m
----------	---------------------------------------

A0-00605	Single Mode 9/125-SC/APC to LC/UPC-2m
----------	---------------------------------------

A0-00606	Single Mode 9/125-SC/APC to SC/APC-2m
----------	---------------------------------------

A0-00607	Single Mode 9/125-FC/UPC to FC/UPC-2m
----------	---------------------------------------

Adapter Cleaning Sticks - 100 pcs/box

02-0A110	1.25mm without ESD (Electro-Static Discharge)
----------	---

02-0A120	2.5mm without ESD (Electro-Static Discharge)
----------	--

02-0B110	1.25mm with ESD (Electro-Static Discharge)
----------	--

02-0B120	2.5mm with ESD (Electro-Static Discharge)
----------	---

Fiber Cleaner - 400 wipes/pc

02-00411	Reusable Fiber Cleaner-1 slot
----------	-------------------------------

02-00412	Reusable Fiber Cleaner-2 slots
----------	--------------------------------

02-00421	Cartridge-1 slot
----------	------------------

02-00422	Cartridge-2 slots
----------	-------------------

Example : OCI 01-00601

Option: A0-00501 、 A0-00205 、 A0-00601

