



Ascentac OMM300 Series, Optical Multi Meter, combines optical light source (OLS), optical power meter (OPM) and visual fault locator (VFL) in one handheld unit. It's available to test for both Multi-mode and single mode fibers.

Optical Multi Meter

Ascentac OMM300

An Integrated Handheld Fiber Optic Test Tool with OPM, OLS & VFL

| Feature

- Data transfer from a PC via USB
- Memory capacity of 1000 results
- Auto shutdown & backlight sleep mode(Programmable) (Extend the battery life)

| Application

- Optical power or loss measurement in telecom or CATV installation and maintenance

Description

Ascentac OMM300 Series can be used to measure the power in an optical signal. It also provides stable output light with two different wavelength options.

Ascentac OMM300 Series can accommodate up to 1000 results and transfer data to PC via USB connection. It is battery-operated by either dry batteries or rechargeable batteries (4 AAA-size).

Appearance

- 1 2.4 inch ultra-bright TFT color LCD with backlight function (Comfortable and easy to read display for darker operation)
- 2 Dust cap for protecting optical interface plus as a stand for hands-free
- 3 Built-in universal 2.5mm tip sleeve
Option: 2.5mm universal connector male to FC/ SC / LC female adapter




Ø 2.5 connector male to FC female adapter Ø 2.5 connector male to SC female adapter Ø 2.5 connector male to LC female adapter

- 4 Hole to attach strap for hands-free
- 5 Menu-oriented operation for easy use
- 6 4 AAA-size dry batteries (Easily obtained) or rechargeable batteries charged by USB (Reduce the operational cost)



Measurement Display


- 1 Wavelength
- 2 Battery status (Low battery indicator to remind users of replacing batteries)
- 3 Function mode
 - OPM: Optical Power Meter
 - OLS: Optical Light Source

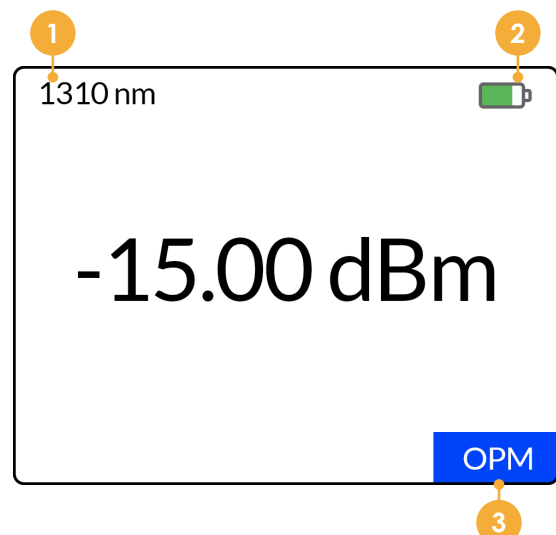

When to Use OMM300


1. Optical Power Measurement


Connect one end of the patch cord to the adapter cap and the other end to the optical output to be measured.

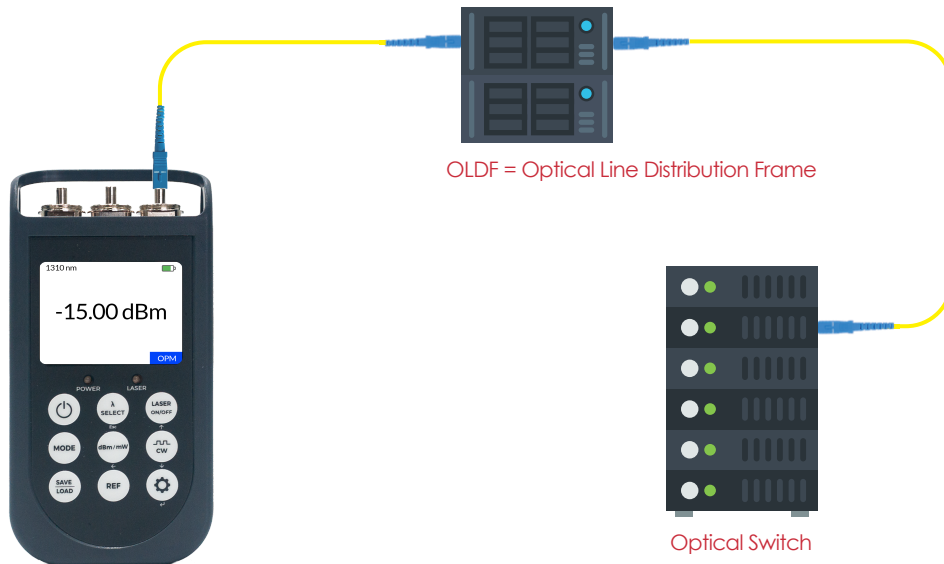


2. Optical Loss Measurement

Performing with OLS to measure optical power to calculate optical loss

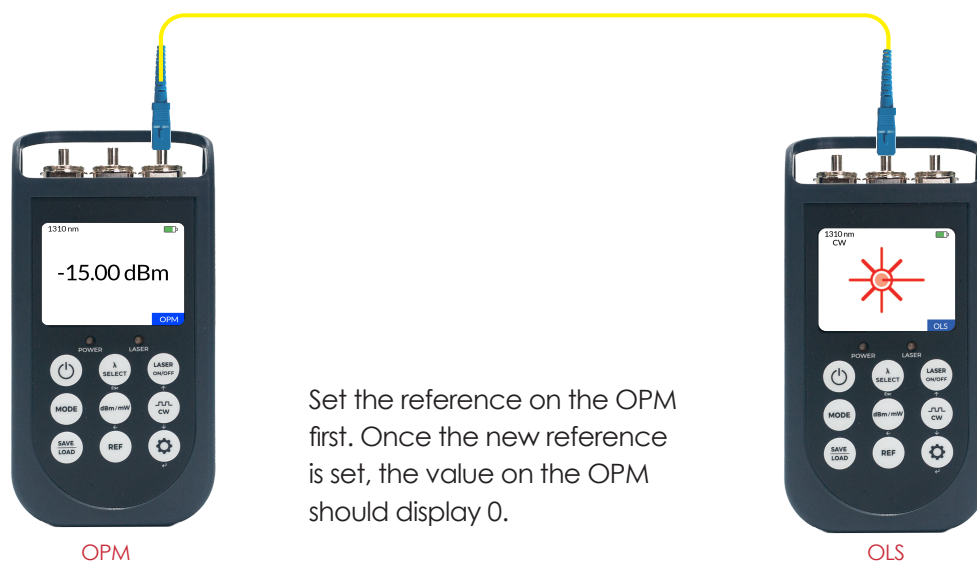

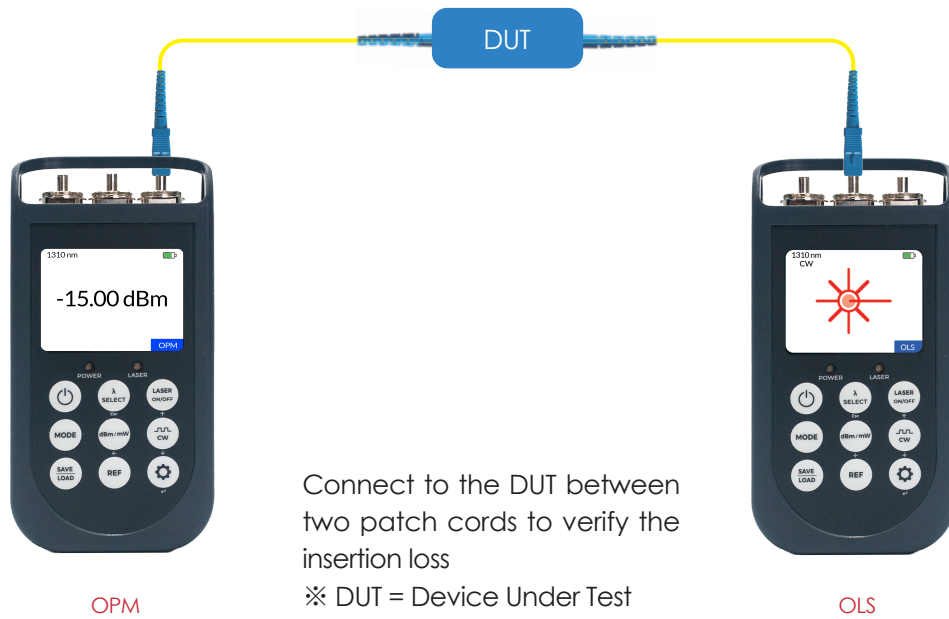

When to Use Built-in VFL in OMM300

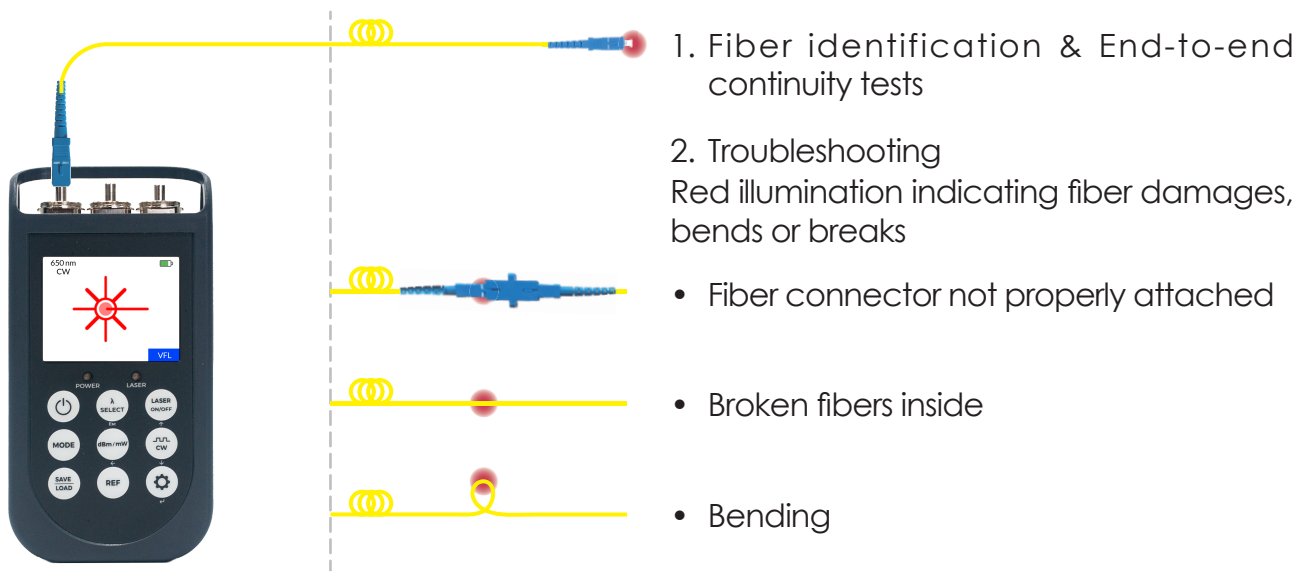

Specification

OPM Specification

Power Range (dBm)	+26 to -50	+6 to -70
Detector	InGaAs	
Uncertainty (dB)	$\leq \pm 5\%$ or $\leq \pm 0.25$ dB (@-10dBm or -20dBm)	
Linearity (dB)	$\leq \pm 0.1$	
Resolution (dB)	$\leq \pm 0.01$	
Wavelength Range (nm)	850, 1300, 1310, 1490, 1550, 1625, 1650	
Optical Connector	Built-in universal 2.5mm tip sleeve Option: 2.5mm universal connector male to FC / SC / LC female adapter	

OLS Specification

Central Wavelength (nm)	850 (± 30)/1300(± 50)	1310/1550(± 20)
Spectral Width (nm)	≤ 5	
Output Power (dBm)	≥ -4	
Stability (dB)	± 0.05 (15 mins, short term) ± 0.2 (8 hours, long term)	
Modulation Output	CW(Continuous Wavelength), 270Hz, 1kHz, 2kHz	
Optical Connector	Built-in universal 2.5mm tip sleeve Option: 2.5mm universal connector male to FC / SC / LC female adapter	

VFL Specification

Wavelength (nm)	650 ± 10 (Visible)
Output Power (mW)	1, 10, 30 or 50 (Option)
Modulation Output	CW (Continuous Wavelength), 1Hz, 2Hz
Distance (km)	5 to 30 (Depend on output power)
Optical Connector	Universal 2.5mm

Display

2.4 inch ultra-bright TFT color LCD with backlight function

Power Supply

1. Dry batteries or rechargeable NiMH batteries (Charged by USB connection): AAA-size x 4
2. AC Input: 100-240VAC / 50-60 Hz

Battery Life (hours) (with backlight-LOW) (OPM mode)	> 25
--	------

Environment

Working Temperature (°C)	-10 to +60
Storage Temperature (°C)	-30 to +70
Relative Humidity (%)	5 to 95, Non-condensing

Memory

Record Storage	1000 results
Data Output	USB interface

Dimensions and Weight

Size (H x W x D) (mm)	150 x 75 x 30
Weight (g) (batteries included)	Approximately 250

Standard Accessories

Main unit, AAA Battery 4pcs, One-year warranty

Certification



| Ordering Information

OMM 01-003XX

Central Wavelength (OLS) & Power Range (OPM)

- 1 : 850nm & 1300nm, +6dBm to -70dBm
- 2 : 850nm & 1300nm, +26dBm to -50dBm
- 3 : 1310nm & 1550nm, +6dBm to -70dBm
- 4 : 1310nm & 1550nm, +26dBm to -50dBm

Output Power (VFL)

- 1 : 1mW
- 2 : 10mW
- 3 : 30mW
- 4 : 50mW

Note : 1. OPM, OLS & VFL all with built-in universal 2.5mm tip sleeve.

Option	
Adaptor for OPM & OLS	
A0-00121	2.5mm Universal Connector Male to FC Female Adapter
A0-00122	2.5mm Universal Connector Male to SC Female Adapter
A0-00123	2.5mm Universal Connector Male to LC Female Adapter
USB Power Adapter	
A0-00201	USB Power Adapter, US Plug
A0-00202	USB Power Adapter, EU Plug
A0-00203	USB Power Adapter, UK Plug
A0-00204	USB Power Adapter, AU Plug
USB Cable	
A0-00301	Micro USB to USB-A
Fiber-optic Patch Cord	
A0-00601	Single Mode 9/125--SC/UPC to SC/UPC--2m
A0-00602	Single Mode 9/125--SC/UPC to LC/UPC--2m
A0-00603	Single Mode 9/125--SC/UPC to ST/UPC--2m
A0-00604	Single Mode 9/125--SC/APC to SC/UPC--2m
A0-00605	Single Mode 9/125--SC/APC to LC/UPC--2m
A0-00606	Single Mode 9/125--SC/APC to SC/APC--2m
A0-00607	Single Mode 9/125--FC/UPC to FC/UPC--2m
Adapter Cleaning Sticks - 100 pcs/box	
02-0A110	1.25mm without ESD (Electro-Static Discharge)
02-0A120	2.5mm without ESD (Electro-Static Discharge)
02-00421	1.25mm with ESD (Electro-Static Discharge)
02-00422	2.5mm with ESD (Electro-Static Discharge)
Fiber Cleaner - 400 wipes/pc	
02-00411	Reusable Fiber Cleaner--1 slot
02-00412	Reusable Fiber Cleaner--2 slots
02-00421	Cartridge--1 slot
02-00422	Cartridge--2 slots
Replacement Parts	
A0-00001	Battery Cover Cap

Example : OMM 01-00311
Option : A0-00121 、A0-00201 、A0-00301

