



Ascentac TestMate2500 Series, Multi-channel Optical Light Source, ensures exceptional power and wavelength stability using Automatic Power Control (APC), with added temperature control on high-power models. Its wide range of wavelength options makes it ideal for testing optical components and CWDM systems.

Multi-channel Optical Light Source

Ascentac TestMate2500

Desk-top 1 to 8 Channel OLS with Stable Output Power and Wavelength

Feature

- Stable laser wavelength
- Stable output power
- Low-brightness, eye-comfort display for extended use
- Space-saving design for vertical or horizontal placement
- Supports remote control via Ethernet port
- USB Type-C charging

Application

- Manufacturing & testing of optical components
- CWDM system testing


Description

Operate locally via the intuitive front panel or remotely through standard Ethernet (LAN) and RS232 interfaces. This dual-control capability allows for seamless integration into any automated test environment.

The compact, dual-orientation design maximizes valuable bench space. A simple, user-friendly interface streamlines the workflow, making even complex testing straightforward and efficient.

Optical Component Testing

Measures the insertion loss of optical splitters when paired with an Optical Power Meter (OPM).

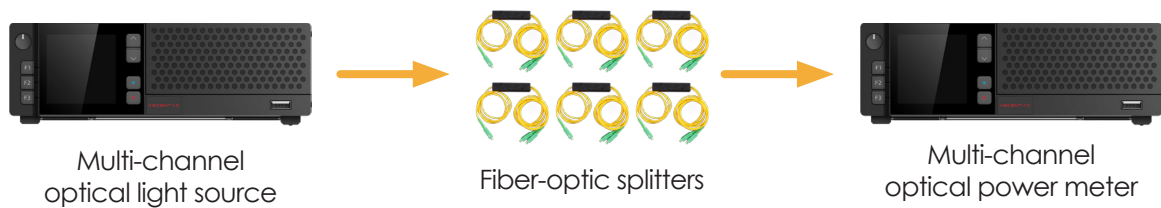


Vertical or Horizontal. Always Compact.



Appearance

- 1 Power switch
- 2 2.7-inch color screen
- 3 Control knob
- 4 Dust cap for optical interface
- 5 Function keys
- 6 USB-A port
- 7 Grounding terminal
- 8 Ethernet port
- 9 RS232 port
- 10 USB-A port
- 11 USB Type-C charging port

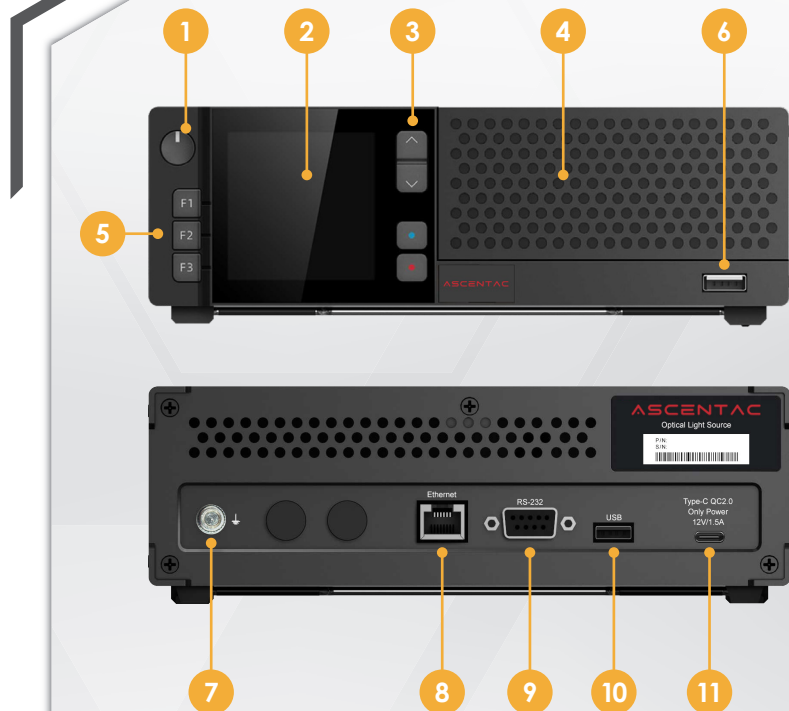

Specification

OLS		
Channel	1 to 8	
Laser Type	FP: MM 50/125um DFB: SM 9/125um	
Typical Wavelengths (nm)	MM: 850, 1300 SM: 1310, 1490, 1550, 1625 or as specified by customers	
Output Power (mW)	< 1	< 10
Stability (dB)	± 0.02 @ 15mins ± 0.05 @ 8 hrs	± 0.003 @ 15 mins ± 0.01 @ 8 hrs
Side-Mode Suppression Ratio (SMSR) (dB)	40	45
Modulation Frequency	CW、270Hz、330Hz、1kHz、2kHz	
Optical Connector Type	FC/APC	

Display

2.7-inch color display
Resolution: 320 x 320 pixels

Interface

1. 2 USB-A ports
2. USB-C charging port
3. Ethernet port (RJ45)
4. RS232 port
5. Grounding terminal

Environment

Working Temperature (°C)	0 to 40
Storage Temperature (°C)	-20 to 70
Relative Humidity (%)	< 90, Non-condensing

Dimension and Weight

L x W x H (mm)	215 x 210 x 65
Weight (g)	1000


Standard Accessories

Main unit, Power adapter
USB power cable, 1-year warranty

Note:

1. At an ambient temperature of 23 ± 2 °C.
2. Measured with an FC/PC polished connector.
3. Stability is specified for the DFB laser model.
4. Recommended calibration interval: 2 years.

Ordering Information

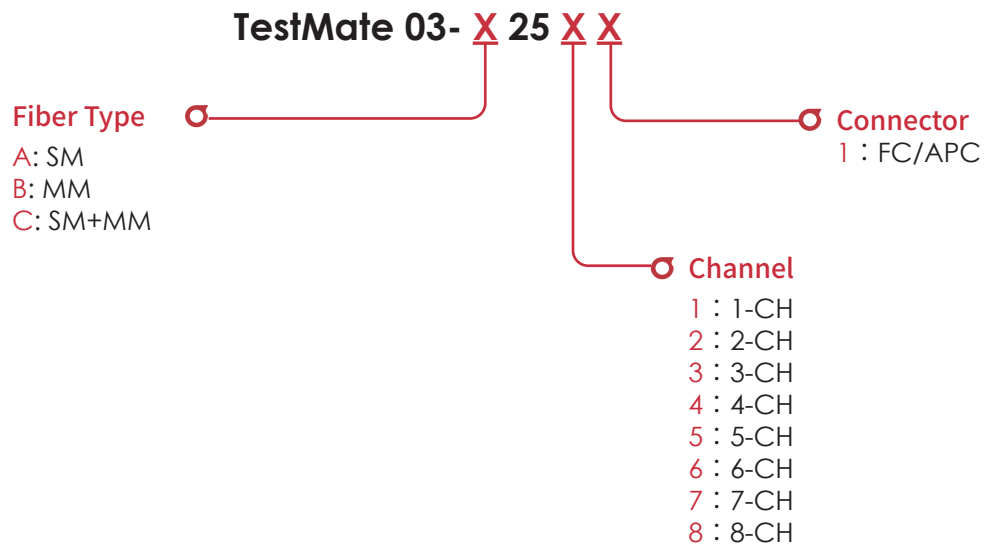

Note: 1. Please specify the required wavelengths and select the corresponding output power (1mW or 10mW) for each when placing your order.

Example: TestMate 03-C2581

Wavelength: 850, 1300, 1310, 1490, 1550, 1570, 1625, 1650nm

Output power: 1mW



© Copyright 2025 Ascentac. All rights reserved. The information in this document is subject to change without notice.

For the latest information regarding this product, please visit our website at <http://www.ascentac.com>



Contact us