




ASCENTAC
FiberTrace

Chassis

Ascentac OCAMS8010

| Description

Ascentac FiberTrace OCAMS8010, Chassis of Remote Test Unit (RTU) with standard 2U design and 6 slots, can be mounted in 19, 21 or 23-inch EIA-310 racks. The outer frame is rust-proof. The chassis is equipped with 2 detachable fans to dissipate heat.

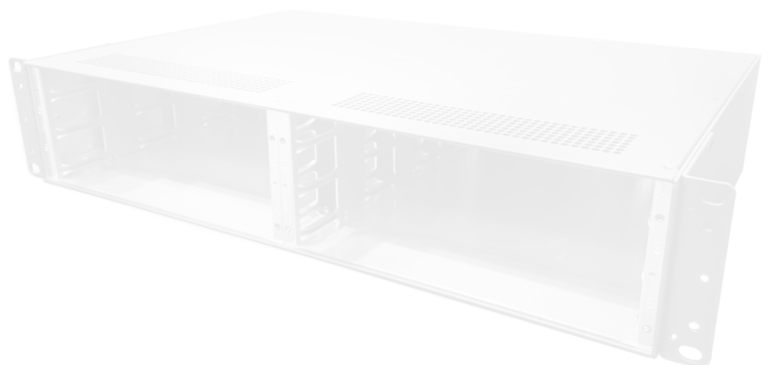

Specification

Chassis	
Slot	6
Dimension (H x W x D) (mm)	88.9 x 438 x290
Features	1. Power supply connection and protection 2. Automatic chassis connection detection 3. Remote reboot 4. Remote firmware update
Accessories	Mounting brackets (lockable for installation in 19", 21", or 23" racks)

Ordering Information

OCAMS 04-**80100**

Chassis 

EXAMPLE : OCAMS 04-80100



© Copyright 2026 Ascentac. All rights reserved. The information in this document is subject to change without notice.

For the latest information regarding this product, please visit our website at <http://www.ascentac.com>



Contact us